

Insert Slit Holder & Insert Slit <KEI-100XY&KEI-100SL>


< Ex. Slit holder on stages >



< The special 0.005 mm slit >

Features

- ◆ This insert slit holder contains a stopper, a leaf spring, and a string for reproducing of the slit position.
- ◆ Any width of slit is available(0.01 – 1.0 mm).
- ◆ The width is indicated on the SUS plate for easy choice.
- ◆ Kohzu's technician adjusts the width of each slit by using a microscope.
- ◆ Any orientation is OK.
- ◆ Easy assemble for Kohzu's motorized positioning stages.
- ◆ The Tantalum slit is polished by a special delicate technique.
- ◆ Ni-coating for the main body.

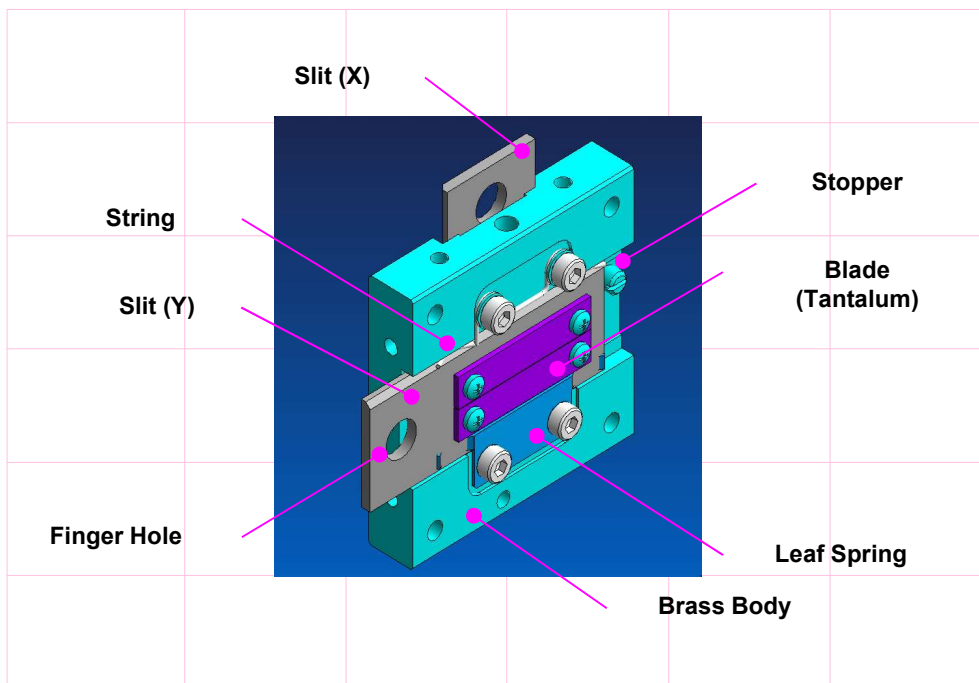

Specifications

Model	KEI-100XY&KEI-100SL
Dimension (W x L x T : mm)	50 x 50 x 17 (Main Body) 59 x 59 x 17 (With Slits) T : (thickness contains the screw's head)
Slits (width)	0.01 – 1.0 mm